


Kategorija: **AMD matične ploče**

Proizvođač: **Gigabyte**

Matična ploča Gigabyte AM5 X870E AORUS PRO X iCE

Web cena: 52.690,00 RSD

Šifra: **X870E AORUS PRO X iC**

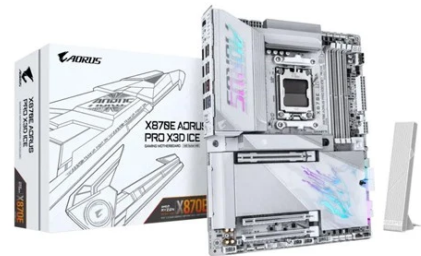

Specifikacija

Model	Gigabyte X870E AORUS PRO X3D ICE Wi-Fi7 AM5 DDR5 ATX Matična ploča
Socket	AMD Socket AM5
Skup čipova (Chipset)	AMD X870E
Podrška za procesore	AMD Ryzen 9000 Series ProcessorsAMD Ryzen 8000 Series ProcessorsAMD Ryzen 7000 Series Processors
Tip memorije - RAM	DDR5
Broj memorijskih slotova	4x 288-Pin DDR5
Opis za memorije	Support for DDR5 9000(O.C) / 8800(O.C) / 8600(O.C) / 8400(O.C) / 8200(O.C.) / 8000(O.C) / 7800(O.C) / 7600(O.C) / 7200(O.C.) / 7000(O.C.) / 6800(O.C.) / 6600(O.C.) / 6400(O.C) / 6200(O.C) / 6000(O.C) / 5600(O.C) / 5200 / 4800 MT/s memory modules.4 x DDR5 DIMM sockets supporting up to 256 GB (64 GB single DIMM capacity) of system memoryDual channel memory architectureSupport for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modulesSupport for AMD EXtended Profiles for Overclocking (AMD EXPO) and Extreme Memory Profile (XMP) memory modules(The CPU and memory configuration may affect the supported memory types, data rate (speed), and number of DRAM modules, please refer to "Memory Support List" on GIGABYTE's website for more information.)
Opis za proširenja	1 x PCI Express x16 slot (PCIEX16), integrated in the CPU: AMD Ryzen 9000/7000 Series Processors support PCIe 5.0 x16 modeAMD Ryzen 8000 Series-Phoenix 1 Processors support PCIe 4.0 x8 modeAMD Ryzen 8000 Series-Phoenix 2 Processors support PCIe 4.0 x4 modeThe PCIEX16 slot can only support a graphics card or an NVMe SSD. If only one graphics card is to be installed, be sure to install it in the PCIEX16 slot. Chipset:- 1 x PCI Express x16 slot, supporting PCIe 4.0 and running at x4 (PCIEX4)- 1 x PCI Express x16 slot, supporting PCIe 3.0 and running at x2 (PCIEX2)
Ukupno M.2 slotova	4x M.2 slot
SATA portovi	4x SATA 6Gb/s
Brzina LAN porta	Realtek 5GbE LAN chip (5 Gbps/2.5 Gbps/1 Gbps/100 Mbps)

Wi-Fi standard	Qualcomm Wi-Fi 7 QCNCM865- 802.11a, b, g, n, ac, ax, be, supporting 2.4/5/6 GHz carrier frequency bands- Support for 11be 320MHz wireless standard(Actual data rate may vary depending on environment and equipment.)
Bluetooth verzija	BLUETOOTH 5.4
Zvuk / Audio	Realtek ALC1220 CODECThe back panel line out jack supports DSD audio.High Definition Audio2/4/5.1/7.1-channelYou can change the functionality of an audio jack using the audio software. To configure 7.1-channel audio, access the audio software for audio settings.Support for S/PDIF Out
Ukupan broj USB portova	CPU+ASMedia USB4 controller:- 2 x USB4 USB Type-C ports on the back pane CPU:- 1 x USB Type-C port on the back panel, with USB 3.2 Gen 2 support Chipset+USB 3.2 Gen 1 Hub:- 4 x USB 3.2 Gen 1 ports available through the internal USB headers Chipset:- 1 x USB Type-C port with USB 3.2 Gen 2x2 support, available through the internal USB header (Supports up to 65W PD 3.0/QC 4+ fast charging)For precautions regarding the fast charging function, refer to "USB Type-C Header" in Chapter 2-7, "Internal Connectors."- 1 x USB Type-C port on the back panel, with USB 3.2 Gen 2 support- 5 x USB 3.2 Gen 2 Type-A ports (red) on the back panel- 3 x USB 3.2 Gen 1 ports on the back panel- 4 x USB 2.0/1.1 ports available through the internal USB headers
Konektori na zadnjoj strani	1 x HDMI port (Note)1 x reset button1 x power button1 x Clear CMOS button1 x Q-Flash Plus button5 x USB 3.2 Gen 2 Type-A ports (red)2 x USB Type-C ports, with USB 3.2 Gen 2 support2 x USB4 USB Type-C ports (DisplayPort (Note))1 x RJ-45 port3 x USB 3.2 Gen 1 ports2 x antenna connectors (2T2R)2 x audio jacks1 x optical S/PDIF Out connector
Unutrašnji konektori	1 x 24-pin ATX main power connector2 x 8-pin ATX 12V power connectors1 x PCIe power connector1 x CPU fan header1 x CPU fan/water cooling pump header4 x system fan headers2 x system fan/water cooling pump headers3 x addressable RGB Gen2 LED strip headers1 x RGB LED strip header4 x SATA 6Gb/s connectors4 x M.2 Socket 3 connectors1 x front panel header1 x front panel audio header1 x USB Type-C header, with USB 3.2 Gen 2x2 support2 x USB 3.2 Gen 1 headers2 x USB 2.0/1.1 headers1 x noise detection header1 x HDMI port (Note)1 x Trusted Platform Module header (For the GC-TPM2.0 SPI V2 module only)2 x temperature sensor headers1 x reset jumper1 x Clear CMOS jumper
Posebne mogućnosti	Support for GIGABYTE Control Center (GCC)Support for Q-FlashSupport for Q-Flash PlusSupport for Smart BackupVoltage detectionTemperature detectionFan speed detectionWater cooling flow rate detectionFan fail warningFan speed controlNoise detection
BIOS	1 x 512 Mbit flashUse of licensed AMI UEFI BIOSPnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
Format	ATX
Prava potrošača:	Zakonska saobraznost 2 godine

Raspoloživost robe možete proveriti pozivanjem Call Centra na 032/340-410

Cena na sajtu su iskazane u dinarima sa uračunatim porezom, a plaćanje se vrši isključivo u dinarima.

Nastojimo da budemo što precizniji u opisu proizvoda, prikazu slika i samih cena, ali ne možemo garantovati da su sve informacije kompletne i bez grešaka. Svi artikli prikazani na sajtu su deo naše ponude i ne podrazumeva da su dostupni u svakom trenutku.